OLIVALS
Online Valve Lubrication & Sealing

OLIVALS – VL VALVE LUBRICANT

OLIVALS-VL is an excellent valve lubricant which reduces friction during valves operation. It allows valves to turn easily, thereby extending their lifetime and performance. It is resistant to many solvents and chemicals including H_2S, crude oil, oilfield brine water and sea water. It is waterproof and contains strong properties to avoid frequent hardening. OLIVALS-VL adheres to metal assuring protection against rust and corrosion.

FEATURES:

- Minimizes friction during operation
- Non-melting and non-hardening
- Rust corrosion and oxidation preventive
- Provides excellent leak resistance
- Contains no bentonite or soap
- Resists H_2S, crude oil oilfield brine water, diesel and sea water
- Insoluble in water
- Water washout resistant
- Extend lifetime and valves performance

RECOMMENDED USE:
For valve manufacturers, valve refurbishes, pipeline and wellhead companies, refineries, chemical processing plants, LNG Plants and highly corrosive areas.

PACKAGING: 40 lbs (18kg)

TYPICAL OBSERVATIONS

Color	Golden
Texture	Smooth Paste
Density, lb/gal @ 77°F (25°C)	8.05
Specific Gravity, @ 77°F (25°C)	0.965
Dropping Point, ASTM, D-2265	>500°F (>260°C)
Flash Point, ASTM D-92	445°F (>229°C)
Penetration, ASTM D-217 worked @ 77°F (25°C)	240
Base Oil Viscosity, cSt @ 40°C (104°F)	2,345.92
Corrosion Preventive Properties, ASTM D1742 @ 125°F (51°C)	Pass
Rust Preventive Test, ASTM D-1743	Pass
Water Washout Characteristics, ASTM D-1264 @ 100°F (37°C)	Nil
Oxidation Stability, ASTM D-942 @ 210°F (98°C), 72 hrs. PSI Loss	1.35%
Temperature Range	-4°F to >400°F (-20°C to >232°C)
Shelf Life (unopened container)	5 years

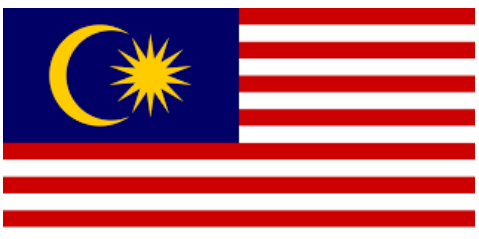

OLIVALS SDN. BHD. (843103-T)
C-7-1 Melawati Corporate Centre,
Jalan Bandar Melawati, Taman Melawati,
53100 Kuala Lumpur, Malaysia.

Tel: +603-4101 0200 Fax: +603-4101 0210 www.olivals.com

Made in U.S.A.
VL (05/24)