OLIVALS
Online Valve Lubrication & Sealing

OLIVALS – VF VALVE LIQUID FLUSH

OLIVALS-VF is a unique combination of valve penetrant and moisture displacer engineered for today's growing valve maintenance market. It is a superior corrosion inhibitor, which safely removes old hydrocarbon and oxidation deposits. It will remove even the toughest sealant deposits which may have solidified in the seat pockets. It provides a superior corrosion inhibiting film that gives unsurpassed protection in harsh conditions and contains no dangerous chlorinated solvents. It will extend the life of the electrical equipment by keeping it clean and lubricated.

FEATURES:

- Rust corrosion and oxidation preventive
- Dissolves hydrocarbon deposits
- No dangerous chlorinated solvents
- Non-flammable
- Cleans off most of metal surfaces

RECOMMENDED USE:
Flushing of seized valves prior to lubrication/sealing to clear out the lubrication passageways, cleaning down of the valves. Highly recommended for all phases of industry.

PACKAGING: 18 litre per pail

TYPICAL OBSERVATIONS

Color	Amber
Texture	Liquid
Odor	Mild Solvent
Density, lb/gal @ 77°F (25°C)	7.343
Specific Gravity, @ 77°F (25°C)	0.880
Viscosity, secs @ 77°F	10 – 12
Freezing Point	<-50°F (<-46°C)
Flash Point, ASTM D-53	147°F (63.8°C)
Boiling Point	356°F (180°C)
Solubility in Water	Insoluble
Shelf Life (unopened container)	5 years

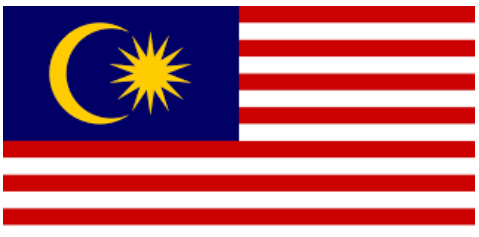

OLIVALS SDN. BHD. (843103-T)
C-7-1 Melawati Corporate Centre,
Jalan Bandar Melawati, Taman Melawati,
53100 Kuala Lumpur, Malaysia.

Tel: +603-4101 0200 Fax: +603-4101 0210 www.olivals.com

Made in U.S.A.
VF (05/24)